

DATE	BY	DESCRIPTION	DATE	BY

Wilson Engineered Systems Part Number: 105621

Voltage: 120/208/3/60

Breakers: Cutler-Hammer ED, 3 pole, 150 amp, 65 KAIC

Maximum UPS Rating: 43 kVA (based upon 80% NEC Rating)

Breakers are behind key lock door (not shown).

Enclosure: Surface Mount, 12 Gauge

**Connections:**

**A - From power source feeding system**  
Lands on bus bar with lugs provided with panel

Lugs: (1) #6 to 250 kcm per phase  
(1) #6 to 250 kcm Neutral  
(1) #14 to #2 Ground

**B - Feeds to associated UPS System, if dual fed UPS 'B' feeds to UPS bypass input, if single fed UPS, feeds to UPS input.**

Phases land on breaker's lugs  
Lugs: (1) #4 to 4/0 per phase  
(1) #6 to 250 kcm Neutral  
(1) #14 to #2 Ground

**C - Feed from associated UPS System output.**


Phases land on breaker's lugs  
Lugs: (1) #4 to 4/0 per phase  
(1) #6 to 250 kcm Neutral  
(1) #14 to #2 Ground

**D - Feeds to critical load being supported by associated UPS System**

Lands on bus bar with lugs provided with panel

Lugs: (1) #6 to 250 kcm per phase  
(1) #6 to 250 kcm Neutral  
(1) #14 to #2 Ground

Note: Field wiring phasing must be clockwise rotation and consistent, A phase must be A phase at all connections, B phase must be B phase at all connections and C phase must be C phase at all connections as the panel operation includes overlapping breaker circuits. Associated UPS must be in bypass mode (without transformation) for make before break operation.

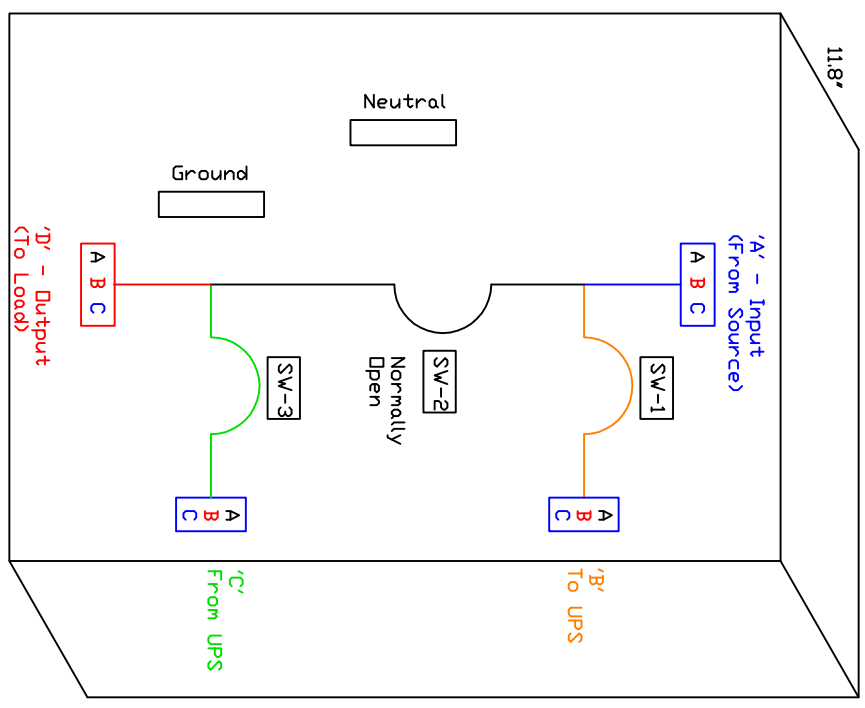

THIS DRAWING CONTAINS  
CONFIDENTIAL & PROPRIETARY INFORMATION  
AND SHALL NOT BE REPRODUCED OR  
TRANSMITTED IN ANY FORM OR BY ANY  
MEANS, WITHOUT THE EXPRESS  
WRITTEN PERMISSION OF  
WILSON ENGINEERED  
SYSTEMS, INC.

Wilson Engineered Systems, Inc.  
11501 Columbia Park Drive West, Bldg 100  
Jacksonville, FL 32258

3 Breaker UPS Bypass Panel  
120/208/3/60 Volt  
150 Amp, 65 KAIC

DATE: 01/11/11  
BY: MBR-3-208-0150-65

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

USER REVDATE FNAME