

Sentry Basic CDU

Key Features


- > **Power Distribution:** 110V, 208V, 230V, 20 or 30-Amp power input feed
- > **Low Density:** Single-power input feed; 12 or 24 outlets per enclosure
- > **Branch Circuit Protection :** Sentry CDUs meet UL 60950-1 requirements
 - > Overcurrent protection with UL-listed Bussman fuses
- > **Rack-Mountable :** Includes horizontal and Zero U

Low-Density Basic Power Distribution

The Sentry Basic Cabinet (Power) Distribution Unit (CDU) product family provides a simple solution where reliable power distribution for equipment racks and other data center applications is needed. Basic CDU's provide both power distribution and branch circuit protection for the 30-Amp rated devices.

The Sentry Basic CDU offers different input and output connections to distribute 110V, 208V or 230V power and a 20 or 30-Amp power input feed. 30-Amp models feature a combination of white and black outlets to easily distinguish between each branch circuit.

The Sentry Basic CDU meets the criteria of Branch Circuit Protection by providing overcurrent protection with UL-listed Bussman® SC fuses for each branch circuit. Branch circuit protection is accomplished via UL-listed Bussman SC fuses for compliance with UL/CSA/EN 60950-1 standards. The Sentry "Basic" Cabinet Power Distribution Unit (CDU) family provides both a reliable and economical solution for your basic power needs.

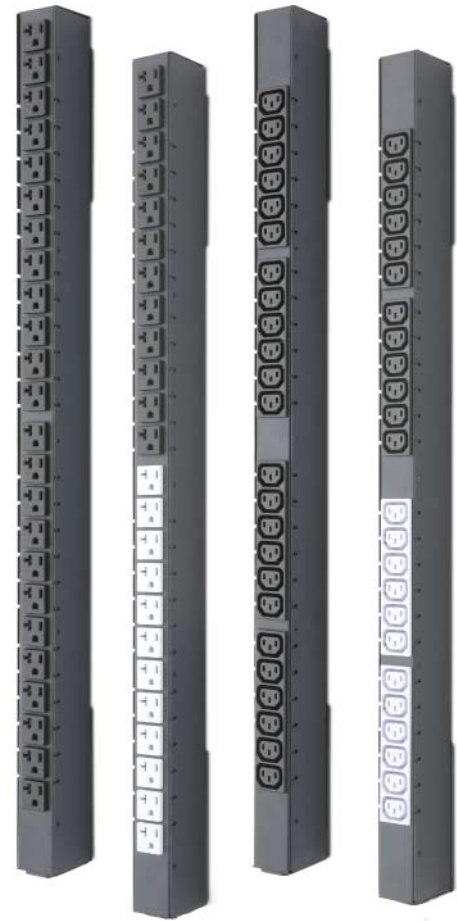

Model	Available Input Voltages	Amperage	Available Input Cord	Outlets	Dimensions
CB-12H1-C20	100-120V 50-60Hz	20A	IEC 60320/C20 Power Inlet*	(12) NEMA 5-20R	17" x 1.75" x 2.25"
CB-12H1-L530	100-120V 50-60Hz	30A	NEMA L5-30P Cordset, 10'	(12) NEMA 5-20R	17" x 1.75" x 2.25"
CB-12H2-C20	208-240V 60Hz	20A	IEC 60320/C20 Power Inlet*	(12) IEC 60320/C13	17" x 1.75" x 2.25"
CB-12H2-L630	208-240V 60Hz	30A	NEMA L6-30P Cordset, 10'	(12) IEC 60320/C13	17" x 1.75" x 2.25"
CB-24V1-C20	100-120V 50-60Hz	20A	IEC 60320/C20 Power Inlet*	(24) NEMA 5-20R	31.25" x 1.75" x 2.25"
CB-24V1-L530	100-120V 50-60Hz	30A	NEMA L5-30P Cordset, 10'	(24) NEMA 5-20R	31.25" x 1.75" x 2.25"
CB-24V2-C20	208-240V 60Hz 230V 50-60Hz	20A	IEC 60320/C20 Power Inlet*	(24) IEC 60320/C13	31.25" x 1.75" x 2.25"
CB-24V2-L630	208-240V 60Hz	30A	NEMA L6-30P Cordset, 10'	(24) IEC 60320/C13	31.25" x 1.75" x 2.25"

*Power cords sold separately

Additional Specifications

Agency Approvals

- > US & Canada (cTUVus mark) to UL 60950-1:2003 and CAN/CSA 22.2 No. 60950-1-03
- > European Union (TUVGS mark) to EN 60950-1:2001
- > FCC Class A, Part 15
- > CE
- > EMC - EN 55022 Class A, EN 55024

Power Cord Options

- > PTCORD-1 IEC 60320/C19 - NEMA L6-20P , 10'
- > PTCORD-2 IEC 60320/C19 - Schuko 10'
- > PTCORD-3 IEC 60320/C19 - IEC 60309 (BS4343, CEE17) 16/20A Blue (UK Commando) 10'
- > PTCORD-4 IEC 60320/C19 - BS1363 13A (UK) 10'
- > PTCORD-5 IEC 60320/C19 - 5-15P (15A Straight-Blade) 10'
- > PTCORD-6 IEC 60320/C19 - 5-20P (20A Straight-Blade) 10'
- > PTCORD-7 IEC 60320/C19 - L5-20P (20A Twist-Lock) 10'
- > PT-ADP-C19 Cable mount IEC 60320/C19 Connector


Server Technology

EMEA	NORTH AMERICA / ASIA
Server Technology Intl	Server Technology, Inc.
Sienna Court	1040 Sandhill Drive
The Broadway	Reno, NV 89521
Maidenhead	United States
Berkshire	1.775.284.2000 Tel
SL6 1NJ	1.775.284.2065 Fax
United Kingdom	sales@servertech.com
+44 (0) 1628 509053 Tel	www.servertech.com
+44 (0) 1628 509100 Fax	www.servertechblog.com
salesint@servertech.com	