

NO.	DATE	DESCRIPTION	BY	CHKD.	APP'D.

Wilson Engineered Systems Part Number: 105617

Voltage: 120/208/3/60

Breakers: Cutler-Hammer EHD, 3 pole, 80 amp, 18 KAIC

Maximum UPS Rating: 23 KVA (based upon 80% NEC Rating)

Breakers are behind key lock door (not shown).

Enclosure: Surface Mount, 12 Gauge

Connections:

A - From power source feeding system
Lands on bus bar with lugs provided with panel

- Lugs: (1) #14 to #2 per phase
- (1) #14 to #2 Neutral

B - Feeds to associated UPS System, if dual fed UPS 'B' feeds to UPS bypass input, if single fed UPS, feeds to UPS input.

Phases land on breaker's lugs

- Lugs: (1) #14 to 1/0 per phase
- (1) #14 to #2 Neutral
- (1) #14 to #2 Ground

C - Feed from associated UPS System output.

Phases land on breaker's lugs


- Lugs: (1) #14 to 1/0 per phase
- (1) #14 to #2 Neutral
- (1) #14 to #2 Ground

D - Feeds to critical load being supported by associated UPS System

Lands on bus bar with lugs provided with panel

- Lugs: (1) #14 to #2 per phase
- (1) #14 to #2 Neutral
- (1) #14 to #2 Ground

Note: Field wiring phasing must be clockwise rotation and consistent, A phase must be A phase at all connections, B phase must be B phase at all connections and C phase must be C phase at all connections as the panel operation includes overlapping breaker circuits. Associated UPS must be in bypass mode (without transformation) for make before break operation.

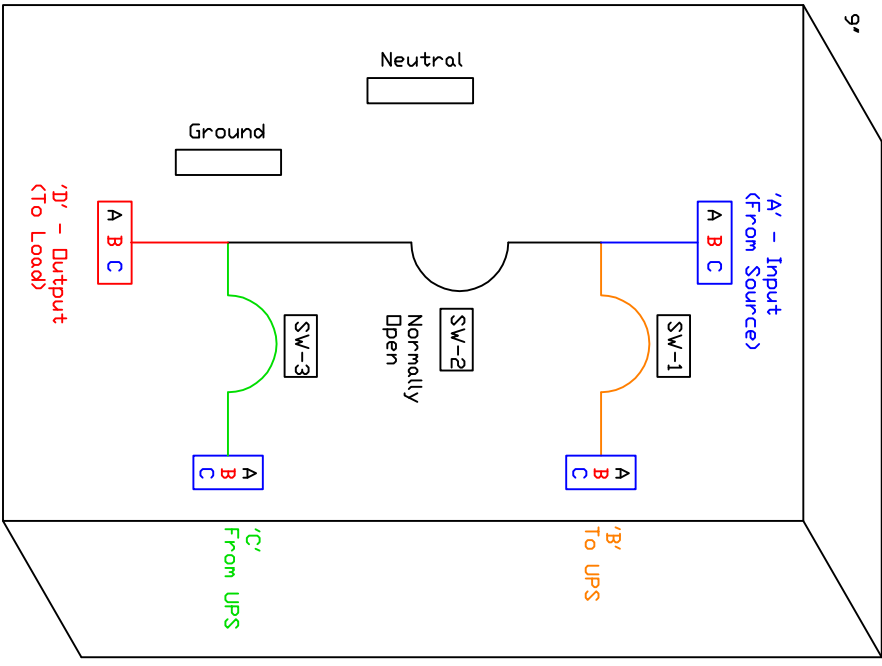

THIS DRAWING CONTAINS CONFIDENTIAL & PROPRIETARY INFORMATION AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE EXPRESS WRITTEN PERMISSION OF WILSON ENGINEERED SYSTEMS, INC.		Wilson Engineered Systems, Inc. 11501 Columbia Park Drive West, Bldg 100 Jacksonville, FL 32258	
3 Breaker UPS Bypass Panel 120/208/3/60 Volt 80 Amp, 18 KAIC		PROJECT NO. MBP-3-208-0080-18	DATE

8 7 6 5 4 3 2 1

A B C D

USER REVDATE FNAME